




English	Français	Deutsch	Italiano	Español
Dome head	Tête plate	Flachrundkopf	Testa tonda	Cabeza alomada
Low carbon steel*	Acier bas carbone*	Stahl*	Acciaio a basso tenore di carbonio*	Acero bajo en carbono*
Zinc plated, thickness 10µm Clear trivalent passivated	Revêtement zingué, épaisseur 10 µm Passivation claire trivalente	Verzinkt, 10 µm Klar chromatiert, Cr6-frei	Zincatura spessore 10µm Passivazione chiara trivalente	Zincado, 10 micras Pasivado claro trivalente

*: SAE 1008 / EN 10263-2 C8C (DIN 10263-2 C8C, Qst 34-3)



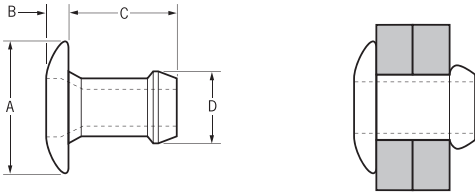



nom.	Ø		Thread		A	B	C	D	lb ^{f1}	lb ^{f1}	Fasteners per pod / Nombre de rivets par chargeur / Niete pro Magazin / Rivetti per caricatore / Uds./carga ± 1	Part No/ref
	min.	max.	min.	max.	max.	max.	max.	max.				
1/8"	.025	.075	.1285	.1315	.257	.039	.152	.1245	255	410	64	01821-00403
	.045	.095					.172				58	01821-00404
	.085	.135					.212				50	01821-00406
	.125	.175					.252				42	01821-00408
	.165	.215					.292				37	01821-00410
	.205	.255					.332				33	01821-00412
	.245	.295					.372				29	01821-00414
	.285	.335					.412				26	01821-00416
5/32"	.062	.115	.1562	.1592	.322	.039	.193	.1535	370	630	52	01821-00505
	.085	.135					.213				48	01821-00506
	.105	.155					.233				44	01821-00507
	.145	.195					.273				38	01821-00509
	.185	.235					.313				34	01821-00511
	.225	.275					.353				30	01821-00513
	.265	.315					.393				27	01821-00515
	.305	.355					.433				24	01821-00517

all dimensions in inches / en pouces / alle Maße in Zoll / in pollici / en pulgadas

1) typical values / valeurs moyennes / typische Werte / Valori tipici / resistencias máximas recomendadas

Briv[®] 1821

Ø					A	B	C	D			Fasteners per pod / Nombre de rivets par chargeur / Niete pro Magazin / Rivetti per caricatore / Uds./carga ± 1	Part No/ref
	min.	max.	min.	max.	max.	max.	max.	max.	lb ^{f1}	lb ^{f1}		
3/16"	.065	.130	.1910	.1940	.382	.046	.212	.1885	505	835	46	01821-00606
	.080	.155					.240				42	01821-00607
	.145	.205					.290				35	01821-00609
	.195	.255					.340				31	01821-00611
	.245	.305					.390				27	01821-00613
	.295	.355					.440				24	01821-00615
	.345	.405					.490				22	01821-00617
6.0 mm	.105	.155	.2338	.2373	.455	.053	.273	.2335	580	950	35	01821-06007
	.145	.195					.313				31	01821-06009
	.185	.235					.353				28	01821-06011
	.225	.275					.393				26	01821-06013
	.265	.315					.433				24	01821-06015
	.305	.355					.473				22	01821-06017

all dimensions in inches / en pouces / alle Maße in Zoll / in pollici / en pulgadas

1) typical values / valeurs moyennes / typische Werte / Valori tipici / resistencias máximas recomendadas



An Acument™ Global Technologies Company

www.avdel-global.com

© 2007 Acument Intellectual Properties, LLC

Briv[®] is a trademark of Avdel UK Limited

04.2007, page 2/2

Data shown is subject to change without prior notice as a result of continuous product development and improvement policy.
Your local Avdel representative is at your disposal should you need to confirm latest information.