


# Briv<sup>®</sup> 1841



For installation information please refer to the tooling overview and manuals on our website [www.avdel-global.com](http://www.avdel-global.com).  
 Pour les conditions de pose, merci de vous référer à la description de l'outil et aux manuels disponibles sur notre site Web.  
 Angaben zur Verarbeitung entnehmen Sie bitte der Geräteübersicht und den Betriebsanleitungen auf unserer Website.  
 Per informazioni sull'installazione preghiamo consultare i manuali e la panoramica degli attrezzi sul nostro sito web.  
 Para ver información sobre máquinas de colocación, consulte nuestra página web, apartados visión general de máquinas y manuales.

| English                     | Français           | Deutsch       | Italiano                  | Español                       |
|-----------------------------|--------------------|---------------|---------------------------|-------------------------------|
| Dome head                   | Tête plate         | Flachrundkopf | Testa tonda               | Cabeza alomada                |
| Austenitic stainless steel* | Inox austénitique* | Edelstahl*    | Acciaio inox austenitico* | Acero inoxidable austenítico* |
| Polished                    | Poli               | Blank         | Lucido                    | Pulido                        |

\*: BS 3111 394S17 Werkstoff 1.4567

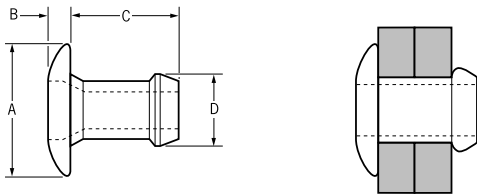

| ø              | A    |      | B    |      | C   | D    | Tensile Strength | Shear Strength | Fasteners per pod / Nombre de rivets par chargeur / Niete pro Magazin / Rivetti per caricatore / Uds./carga | Part No/ref |             |
|----------------|------|------|------|------|-----|------|------------------|----------------|---|-------------|-------------|
|                | min. | max. | min. | max. |     |      |                  |                |   |             |             |
| 3.2<br>(1/8")  | 1.14 | 2.42 | 3.27 | 3.34 | 6.2 | 0.99 | 3.16             | 1.3            | 2.0   | 58          | 01841-00404 |
|                | 2.15 | 3.43 |      |      |     |      |                  |                |   | 50          | 01841-00406 |
|                | 3.17 | 4.45 |      |      |     |      |                  |                |   | 42          | 01841-00408 |
|                | 4.19 | 5.47 |      |      |     |      |                  |                |   | 37          | 01841-00410 |
|                | 5.20 | 6.48 |      |      |     |      |                  |                |   | 33          | 01841-00412 |
| 4,0<br>(5/32") | 1.57 | 2.93 | 3.97 | 4.04 | 7.9 | 0.99 | 3.87             | 2.4            | 3.5   | 52          | 01841-00505 |
|                | 2.66 | 3.94 |      |      |     |      |                  |                |   | 44          | 01841-00507 |
|                | 3.68 | 4.96 |      |      |     |      |                  |                |   | 38          | 01841-00509 |
|                | 4.69 | 5.97 |      |      |     |      |                  |                |   | 34          | 01841-00511 |
|                | 5.71 | 6.99 |      |      |     |      |                  |                |   | 30          | 01841-00513 |
| 4.8<br>(3/16") | 2.03 | 3.94 | 4.85 | 4.93 | 9.4 | 1.17 | 4.77             | 3.5            | 5.1   | 42          | 01841-00607 |
|                | 3.68 | 5.21 |      |      |     |      |                  |                |   | 35          | 01841-00609 |
|                | 4.32 | 5.84 |      |      |     |      |                  |                |   | 32          | 01841-00610 |
|                | 4.95 | 6.48 |      |      |     |      |                  |                |   | 31          | 01841-00611 |
|                | 6.22 | 7.75 |      |      |     |      |                  |                |   | 27          | 01841-00613 |
|                | 7.49 | 9.02 |      |      |     |      |                  |                |   | 24          | 01841-00615 |

all dimensions in mm / en millimètres / alle Maße in mm / in millimetri / en milímetros

1) typical values / valeurs moyennes / typische Werte / Valori tipici / resistencias máximas recomendadas



An Acument™ Global Technologies Company

[www.avdel-global.com](http://www.avdel-global.com)

© 2007 Acument Intellectual Properties, LLC

Briv<sup>®</sup> is a trademark of Avdel UK Limited

02a.2007

Data shown is subject to change without prior notice as a result of continuous product development and improvement policy.  
 Your local Avdel representative is at your disposal should you need to confirm latest information.