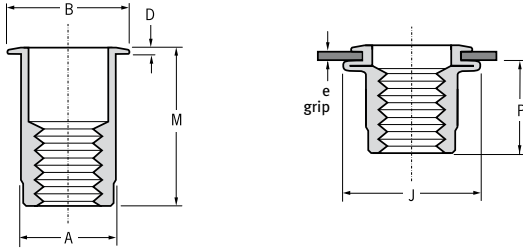



DL DLS



For installation information please refer to the tooling overview and manuals on our website www.avdel-global.com.
 Pour les conditions de pose, merci de vous référer à la description de l'outil et aux manuels disponibles sur notre site Web.
 Angaben zur Verarbeitung entnehmen Sie bitte der Geräteübersicht und den Betriebsanleitungen auf unserer Website.
 Per informazioni sull'installazione preghiamo consultare i manuali e la panoramica degli attrezzi sul nostro sito web.
 Para ver información sobre máquinas de colocación, consulte nuestra página web, apartados visión general de máquinas y manuales.

English	Français	Deutsch	Italiano	Español
Steel	Acier	Stahl	Acciaio	Acero
Zinc plated	Revêtement zingué	Verzinkt	Zincato	Zincado
Clear trivalent passivated	Passivation claire trivalente	Klar chromatiert, Cr6-frei	Passivazione chiara trivalente	Pasivado claro trivalente



Thread / filetage / Gewinde / filetto / rosca	e (grip)		 +.006/-0	A	B	D	J	M	P	Part No/ref
	min.	max.		max.	±.010	±.003	max.	±.015	max.	
6-32 UNC	.020	.080	.2656	.265	.390		.390	.420	.305	DLS-632-80
	.080	.130						.470		DLS-632-130
8-32 UNC	.020	.080	.2969	.296	.415	.030	.450	.420	.315	DIS-832-80
	.080	.130						.470		DLS-832-130
10-24 UNC	.020	.130	.3906	.390	.500		.450	.475	.380	DLS-1024-130
	.130	.225						.585		DLS-1024-225
10-32 UNF	.020	.130	.5312	.530	.685	.035	.740	.475	.470	DLS-1032-130
	.130	.225						.585		DLS-1032-225
1/4-20 UNC	.027	.165	.5312	.530	.685	.035	.740	.580	.470	DLS-420-165
	.165	.260						.680		DLS-420-260
1/4-28 UNF	.027	.165	.5312	.530	.685	.035	.740	.580	.470	DLS-428-165
	.165	.260						.680		DLS-428-260
5/16-18 UNC	.027	.150	.5312	.530	.685	.035	.740	.690	.425	DLS-518-150
	.150	.312						.805		DLS-518-312
5/16-24 UNF	.027	.150	.5312	.530	.685	.035	.740	.690	.470	DLS-524-150
	.150	.312						.805		DLS-524-312
3/8-16 UNC	.027	.150	.5312	.530	.685	.035	.740	.690	.470	DLS-615-150
	.150	.312						.805		DLS-616-312
3/8-24 UNF	.027	.150	.5312	.530	.685	.035	.740	.690	.470	DLS-624-150
	.150	.312						.805		DLS-624-312

all dimensions in inches / en pouces / alle Maße in Zoll / in pollici / en pulgadas







An Acument™ Global Technologies Company

www.avdel-global.com

© 2008 Acument Intellectual Properties, LLC

02.2008, page 1/2

Data shown is subject to change without prior notice as a result of continuous product development and improvement policy.
 Your local Avdel representative is at your disposal should you need to confirm latest information.

Thread / filetage / Gewinde / filetto / rosca				
	Recommended max torque	Pull-out	Torque-to-turn	Push-out
	lbf-in	lbf	lbf-in	lbf
6-32 UNC	47	520	10	180
8-32 UNC	65			
10-24 UNC	95	630	12	335
10-32 UNF				
1/4-20 UNC	235	685		320
1/4-28 UNF				
5/16-18 UNC	N/A	1115	24	510
5/16-24 UNF				
3/8-16 UNC				
3/8-24 UNF				