




| English | Français | Deutsch | Italiano | Español |
|----------------------------|-------------------------------|----------------------------|-------------------------------------|---------------------------|
| Large flange | A collerette | Flachkopf | Flangiato | Ala Ancha |
| Hexagonal body | Hexagonal corps | Hexagonaler Schaft | Hexagonal corpo | Hexagonal cuerpo |
| Low carbon steel* | Acier bas carbone* | Stahl* | Acciaio a basso tenore di carbonio* | Acero bajo en carbono* |
| Zinc plated | Revêtement zingué, | Verzinkt | Zincatura spessore | Zincado |
| Clear trivalent passivated | Passivation claire trivalente | Klar chromatiert, Cr6-frei | Passivazione chiara trivalente | Pasivado claro trivalente |

* : DIN EN 10263-2 Qst 34-3, BS EN/DIN 10263-2 C8C, Werkstoff 1.0213, SAE 1008

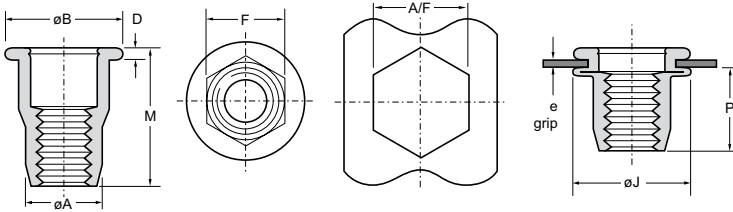

| Thread / filetage / Gewinde / filetto / rosca | A/F rec. | | e (grip) | | øA | øB | D | F | øJ | M | P | Part No/ref |
|--|----------|-------|----------|------|--------|-------|--------|--------|-------|--------|-------|-------------|
| | min. | max. | min. | max. | ± 0.08 | max. | ± 0.13 | ± 0.08 | max. | ± 0.50 | max. | |
| M4 x 0.7 | 6.00 | 6.10 | 0.50 | 2.00 | 5.89 | 9.17 | 1.00 | 5.89 | 9.20 | 10.00 | 5.00 | 09498-72415 |
| M5 x 0.8 | 7.00 | 7.10 | 0.50 | 3.00 | 6.89 | 10.17 | 1.00 | 6.89 | 11.20 | 13.20 | 6.80 | 09498-72516 |
| | | | 3.00 | 5.50 | | | | | | 15.70 | | 09498-72520 |
| M6 x 1.0 | 9.00 | 9.10 | 0.50 | 3.00 | 8.89 | 13.20 | 1.50 | 8.89 | 13.40 | 15.50 | 10.10 | 09498-72620 |
| M8 x 1.25 | 11.00 | 11.10 | 0.50 | 3.00 | 10.89 | 16.28 | 1.50 | 10.89 | 16.20 | 18.00 | 11.40 | 09498-72823 |
| | | | 3.00 | 5.50 | | | | | | 20.5 | | 09498-72826 |
| M10 x 1.5 | 13.00 | 13.10 | 1.00 | 3.50 | 12.89 | 19.10 | 2.00 | 12.89 | 18.50 | 21.0 | 13.20 | 09498-72026 |
| M12 x 1.75 | 16.00 | 16.10 | 1.50 | 4.50 | 15.89 | 23.30 | 2.25 | 15.89 | 23.60 | 27.8 | 17.00 | 09498-72235 |

all dimensions in mm / en millimètres / alle Maße in mm / in millimetri / en milímetros

| Thread / filetage / Gewinde / filetto / rosca | | | | |
|--|---------|------|---------|------|
| | Nm max. | kN | Nm min. | kN |
| M4 x 0.7 | 5.1 | 6.3 | 4.5 | 2.2 |
| M5 x 0.8 | 7.9 | 8.8 | 8.6 | 3.6 |
| M6 x 1.0 | 12.4 | 14.4 | 11.9 | 5.3 |
| M8 x 1.25 | 32.0 | 15.0 | 25.0 | 8.0 |
| M10x x 1.5 | 45.0 | 19.7 | 45.2 | 9.2 |
| M12 x 1.75 | 60.0 | 21.3 | 58.0 | 10.2 |