


# Interlock® BAPI



For installation information please refer to the tooling overview and manuals on our website [www.avdel-global.com](http://www.avdel-global.com).  
 Pour les conditions de pose, merci de vous référer à la description de l'outil et aux manuels disponibles sur notre site Web.  
 Angaben zur Verarbeitung entnehmen Sie bitte der Geräteübersicht und den Betriebsanleitungen auf unserer Website.  
 Per informazioni sull'installazione preghiamo consultare i manuali e la panoramica degli attrezzi sul nostro sito web.  
 Para ver información sobre máquinas de colocación, consulte nuestra página web, apartados visión general de máquinas y manuales.

English	Français	Deutsch	Italiano	Español
Protruding head	Tête bombée	Flachrundkopf	Testa tonda	Cabeza alomada
Body: Aluminium alloy* (5 % Mg) Natural	Corps: Alliage d'aluminium* (5% Mg) Brut	Hülse: Aluminium* (5 % Mg) Blank	Corpo: Lega di alluminio* (5% Mg) Nessuna finitura	Cuerpo: Aluminio* (5% Mg) Natural
Stem: Aluminium alloy** Natural	Tige: Alliage d'aluminium** Brut	Dorn: Aluminium** Blank	Gambo: Lega di alluminio** Nessuna finitura	Vástago: Aluminio** Natural

\*: BS 1473 5056 DIN 1725 AlMg5 Werkstoff 3.3555  
 \*\*: 7178

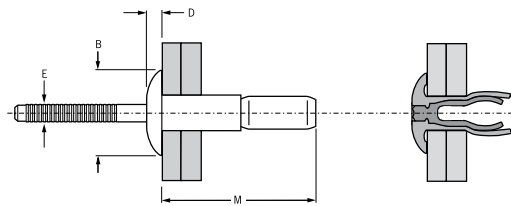

Ø	[Cross-section diagram]		[Thread diagram]		M	B	D	E	[Head profile diagram]	[Cross-section diagram]	Part No/ref
	min.	max.	min.	max.							
3/16" (4.8 mm)	.062	.250	.194	.204	.842	.400	.090	.122	550	450	BAPI-06-04
	.214	.437			.875						BAPI-06-07
	.375	.625			1.090						BAPI-06-10
	.062	.437			.975						BAPI-E06-07
1/4" (6.4 mm)	.080	.375	.261	.276	1.181	.530	.117	.162	1270	830	BAPI-08-06
	.350	.625			1.300						BAPI-08-10
	.080	.625			1.400						BAPI-E08-10

all dimensions in inches / en pouces / alle Maße in Zoll / in pollici / en pulgadas

1) typical values / valeurs moyennes / typische Werte / Valori tipici / resistencias máximas recomendadas



An Acument™ Global Technologies Company

[www.avdel-global.com](http://www.avdel-global.com)

© 2007 Acument Intellectual Properties, LLC

Interlock® is a trademark of Avdel UK Limited

05.2008

Data shown is subject to change without prior notice as a result of continuous product development and improvement policy.  
 Your local Avdel representative is at your disposal should you need to confirm latest information.