


# Interlock® BAPI



For installation information please refer to the tooling overview and manuals on our website [www.avdel-global.com](http://www.avdel-global.com).  
 Pour les conditions de pose, merci de vous référer à la description de l'outil et aux manuels disponibles sur notre site Web.  
 Angaben zur Verarbeitung entnehmen Sie bitte der Geräteübersicht und den Betriebsanleitungen auf unserer Website.  
 Per informazioni sull'installazione preghiamo consultare i manuali e la panoramica degli attrezzi sul nostro sito web.  
 Para ver información sobre máquinas de colocación, consulte nuestra página web, apartados visión general de máquinas y manuales.

| English                                       | Français                                       | Deutsch                                | Italiano   | Español                                 |
|---|--|--|--|---|
| Protruding head                               | Tête bombée                                    | Flachrundkopf                          | Testa tonda  | Cabeza alomada                          |
| Body: Aluminium alloy*<br>(5 % Mg)<br>Natural | Corps: Alliage<br>d'aluminium* (5% Mg)<br>Brut | Hülse: Aluminium*<br>(5 % Mg)<br>Blank | Corpo: Lega di alluminio*<br>(5% Mg)<br>Nessuna finitura | Cuerpo: Aluminio*<br>(5% Mg)<br>Natural |
| Stem: Aluminium alloy**<br>Natural            | Tige: Alliage d'aluminium**<br>Brut            | Dorn: Aluminium**<br>Blank             | Gambo: Lega di alluminio**<br>Nessuna finitura           | Vástago: Aluminio**<br>Natural          |

\*: BS 1473 5056 DIN 1725 AlMg5 Werkstoff 3.3555  
 \*\*: 7178

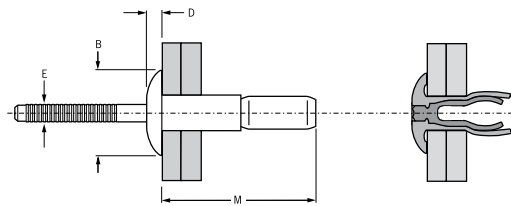

| ø              |      |       |      |      | M    | B    | D   | E   |     |     | Part No/ref |
|----------------|------|-------|------|------|------|------|-----|-----|-----|-----|-------------|
|                | nom. | min.  | max. | min. |      |      |     |     |     |     |             |
| 4.8<br>(3/16") | 1.57 | 6.35  | 4.93 | 5.18 | 21.4 | 10.2 | 2.3 | 3.1 | 2.4 | 2.0 | BAPI-06-04  |
|                | 5.44 | 11.10 |      |      | 22.3 |      |     |     |     |     | BAPI-06-07  |
|                | 9.53 | 15.88 |      |      | 27.7 |      |     |     |     |     | BAPI-06-10  |
|                | 1.57 | 11.10 |      |      | 24.8 |      |     |     |     |     | BAPI-E06-07 |
| 6.4<br>(1/4")  | 2.03 | 9.53  | 6.63 | 7.01 | 30.0 | 13.5 | 3.0 | 4.1 | 5.6 | 3.6 | BAPI-08-06  |
|                | 8.89 | 15.88 |      |      | 33.1 |      |     |     |     |     | BAPI-08-10  |
|                | 2.03 | 15.88 |      |      | 35.6 |      |     |     |     |     | BAPI-E08-10 |

all dimensions in mm / en millimètres / alle Maße in mm / in millimetri / en milímetros

1) typical values / valeurs moyennes / typische Werte / Valori tipici / resistencias máximas recomendadas



An Acument™ Global Technologies Company

[www.avdel-global.com](http://www.avdel-global.com)

© 2007 Acument Intellectual Properties, LLC

Interlock® is a trademark of Avdel UK Limited

05.2008

Data shown is subject to change without prior notice as a result of continuous product development and improvement policy.  
 Your local Avdel representative is at your disposal should you need to confirm latest information.