


# Interlock® SSPI



For installation information please refer to the tooling overview and manuals on our website [www.avdel-global.com](http://www.avdel-global.com).  
 Pour les conditions de pose, merci de vous référer à la description de l'outil et aux manuels disponibles sur notre site Web.  
 Angaben zur Verarbeitung entnehmen Sie bitte der Geräteübersicht und den Betriebsanleitungen auf unserer Website.  
 Per informazioni sull'installazione preghiamo consultare i manuali e la panoramica degli attrezzi sul nostro sito web.  
 Para ver información sobre máquinas de colocación, consulte nuestra página web, apartados visión general de máquinas y manuales.

English	Français	Deutsch	Italiano	Español
Protruding head	Tête bombée	Flachrundkopf	Testa tonda	Cabeza alomada
Body: Steel* Zinc plated	Corps: Acier* Revêtement zingué	Hülse: Stahl* verzinkt	Corpo: Acciaio* Zincati	Cuerpo: Acero* Zincado
Stem: Steel* Zinc plated Clear trivalent chromated	Tige: Acier* Revêtement zingué Passivation claire trivalente	Dorn: Stahl* verzinkt Klar chromatiert, Cr6-frei	Gambo: Acciaio* Zincati Passivazione chiara trivalente	Vástago: Acero* Zincado Passivado claro trivalente

\*: BS 3111 Type 1 SAE 1038

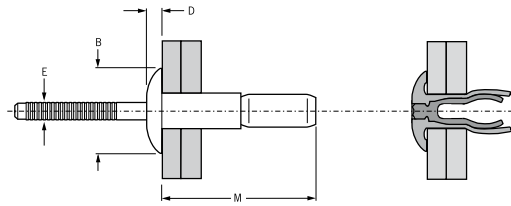

ø					M	B	D	E			Part No/ref
	nom.	min.	max.	min.							
4.8 (3/16")	1.57	6.35	4.93	5.18	18.2	10.2	2.3	3.1	5.78	4.44	SSPI-06-04
	5.44	11.10			25.5						SSPI-06-07
	9.53	15.88			27.7						SSPI-06-10
	1.57	11.10			25.5						SSPI-E06-07
6.4 (1/4")	2.03	9.53	6.63	7.01	30.0	13.5	3.0	4.1	10.67	8.22	SSPI-08-06 <sup>1)</sup>
	8.89	15.88			33.7						SSPI-08-10
	2.03	15.88			36.2						SSPI-E08-10
10.0 (3/8")	3.05	15.88	9.96	10.39	39.4	19.6	4.4	6.1	26.24	16.01	SSPI-12-10

all dimensions in mm / en millimètres / alle Maße in mm / in millimetri / en milímetros

1) Deutsches Institut für Bautechnik (DIBt) Zulassung Nr. Z-14.1-4 Anlage 2-23