


Maxlok® 1903

For installation information please refer to the tooling overview and manuals on our website www.avdel-global.com.
 Pour les conditions de pose, merci de vous référer à la description de l'outil et aux manuels disponibles sur notre site Web.
 Angaben zur Verarbeitung entnehmen Sie bitte der Geräteübersicht und den Betriebsanleitungen auf unserer Website.
 Per informazioni sull'installazione preghiamo consultare i manuali e la panoramica degli attrezzi sul nostro sito web.
 Para ver información sobre máquinas de colocación, consulte nuestra página web, apartados visión general de máquinas y manuales.



English	Français	Deutsch	Italiano	Español
Mushroom head	Tête large	Rundkopf groß	Testa larga	Cabeza alomada de perfil alto
Pin: Medium carbon steel* Zinc plated Clear trivalent passivated	Tige: Acier* Revêtement zingué Passivation claire trivalente	Bolzen: Stahl* Verzinkt Klar chromatiert, Cr6-frei	Bullone: Acciaio a carbonio* Zincato Passivazione chiara trivalente	Vástago: Acero medio al carbono* Zincado Pasivado claro trivalente
Collar: Low carbon steel** Zinc plated Clear trivalent passivated	Bague: Acier bas carbone** Revêtement zingué Passivation claire trivalente	Schließring: Stahl** Verzinkt Klar chromatiert, Cr6-frei	Collare: Acciaio a basso tenore di carbonio** Zincato Passivazione chiara trivalente	Collar: Acero bajo en carbono** Zincado Pasivado claro trivalente

*: BS 3111 Type 10, SAE 10B35, DIN 1654, 35B2 **: SAE 1008 EN 10263-2 C8C

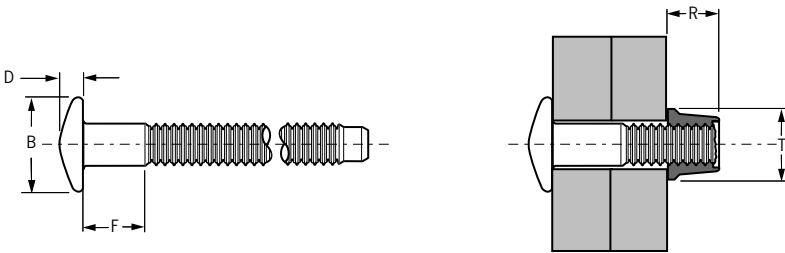

Ø	[Cross-section diagram]		[Thread diagram]	B	D	F	R	T	[Torque diagram]	[Torque diagram]	Part No/ref	Part No/ref
	min.	max.										
4.8 (3/16")	1.6	15.9	5.16	12.5	2.9	2.3	8.7	10.1	8.25	10.01	01903-70610	01981-70600
	7.9	31.7				8.4					01903-70620	
6.4 (1/4")	1.6	15.9	6.75	16.7	3.2	2.2	13.5	13.2	11.79	16.01	01903-70810	01981-70800
	7.9	31.7				9.1					01903-70820	
	27.9	51.7				29.1					01903-70832	

all dimensions in mm / en millimètre / alle Maße in mm / in millimetri / en milímetros

1) typical values / valeurs moyennes / typische Werte / Valori tipici / resistencias máximas recomendadas



An Acument™ Global Technologies Company

www.avdel-global.com

© 2007 Acument Intellectual Properties, LLC

Maxlok® is a trademark of Avdel UK Limited

04.2008

Data shown is subject to change without prior notice as a result of continuous product development and improvement policy.
 Your local Avdel representative is at your disposal should you need to confirm latest information.