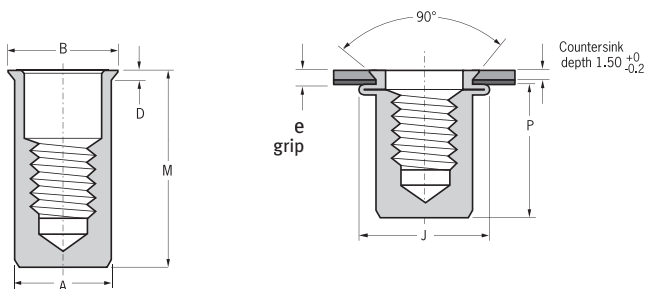



Nutsert® / Finsert® GM57







English	Français	Deutsch	Italiano	Español
90° Countersunk	90° Tête fraisée	90° Senkkopf	90° Testa svasata	90° Cabeza avellanada
Closed end	Borgne	Geschlossen	Fondo cieco	Fondo cerrado
Aluminium alloy* (2.5 % Mg)	Alliage d'aluminium* (2.5% Mg)	Aluminium* (2.5 % Mg)	Lega di alluminio* (2.5% Mg)	Aluminio* (2.5% Mg)
Natural	Brut	Blank	Nessuna finitura	Natural

* : AA 5052, DIN 1725, AlMg2.5, Werkstoff 3.3523



ø	e (grip)		 +0.1/-0	A	B	D	J	M	P	Part No/ref
	min.	max.		max.	+0/-0.4	+0.3/-0.1	max.	± 0.35	max.	
M4 x 0.7	1.70	3.50	6.10	6.00	9.00	1.50	8.10	15.50	10.80	OGM57-00435
	3.50	5.00						17.00		OGM57-00450
M5 x 0.8	1.70	4.00	7.10	7.00	10.00	1.50	9.60	18.00	14.30	OGM57-00540
	4.00	6.50						20.50		OGM57-00565
M6 x 1.0	1.70	4.50	9.10	9.00	12.00	1.50	12.10	22.00	17.50	OGM57-00645
	4.50	6.50						24.00		OGM57-00665
M8 x 1.25	1.70	4.50	11.10	11.00	14.00	1.50	14.50	25.00	19.00	OGM57-00845
	4.50	6.50						28.00		OGM57-00865

all dimensions in mm / en millimètres / alle Maße in mm / in millimetri / en milímetros

ø	 Recommended max torque	 Pull-out	 Torque-to-turn	 Push-out
	Nm max.	kN	Nm min.	kN
M4 x 0.7	4.0	4.7	1.7	1.9
M5 x 0.8	5.3	6.3	2.2	2.6
M6 x 1.0	10.8	10.1	4.7	3.4
M8 x 1.25	23.0	11.7	7.8	3.7



An Acument™ Global Technologies Company

www.avdel-global.com

© 2007 Acument Intellectual Properties, LLC

Nutsert® and Finsert® are trademarks of Avdel UK Limited

03.2007

Data shown is subject to change without prior notice as a result of continuous product development and improvement policy.
Your local Avdel representative is at your disposal should you need to confirm latest information.