


Hemlok® 2241



| English | Français | Deutsch | Italiano | Español |
|---|--|--|--|---|
| Protruding head | Tête bombée | Flachrundkopf | Testa tonda | Cabeza alomada |
| Body: Aluminium alloy* (2.5 % Mg) Natural | Corps: Alliage d'aluminium* (2.5% Mg) Brut | Hülse: Aluminium* (2.5 % Mg) Blank | Corpo: Lega di alluminio* (2.5% Mg) Nessuna finitura | Cuerpo: Aluminio* (2.5% Mg) Natural |
| Stem: Aluminium alloy** Natural | Tige: Alliage d'aluminium** Brut | Dorn: Aluminium** Blank | Gambo: Lega di alluminio** Nessuna finitura | Vástago: Aluminio** Natural |

*: EN AW-5052, AlMg2.5

** : EN AW-7075 AlZn5.5MgCu

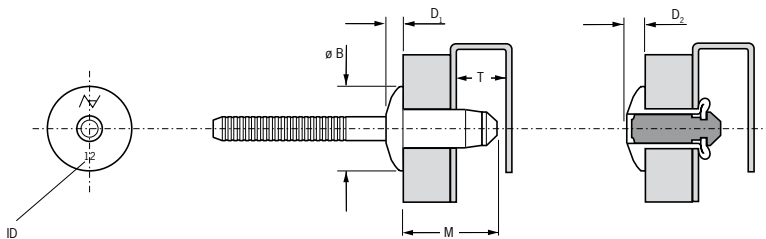

| Ø | [Cross-section diagram] | | [Thread diagram] | | ID | M | Ø B | D ₁ | T | D ₂ | [Resistance diagram] | [Resistance diagram] | Part No/ref | |
|------------------|-------------------------|------|------------------|------|----|------|------|----------------|------|----------------|----------------------|----------------------|-------------|-------------|
| | min. | max. | min. | max. | | | | | | | | | | max. |
| 1/4" (6.4 mm) | .060 | .138 | .264 | .272 | 12 | .539 | .527 | .105 | .480 | .134 | [Resistance diagram] | 607 | 1124 | 02241-00812 |
| | .110 | .189 | | | 13 | .590 | | | | | | | 1349 | 02241-00813 |
| | .132 | .211 | | | 14 | .612 | | | | | | | 1394 | 02241-00814 |
| | .189 | .268 | | | 15 | .669 | | | | | | | 1461 | 02241-00815 |
| | .268 | .346 | | | 17 | .747 | | | | | | | 1573 | 02241-00817 |
| | .346 | .425 | | | 19 | .826 | | | | | | | 1573 | 02241-00819 |
| | .425 | .504 | | | 21 | .905 | | | | | | | 1573 | 02241-00821 |

all dimensions in inches / en pouces / alle Maße in Zoll / in pollici / en pulgadas

1) typical values / valeurs moyennes / typische Werte / Valori tipici / resistencias máximas recomendadas



An Acument™ Global Technologies Company

www.avdel-global.com

© 2007 Acument Intellectual Properties, LLC

Hemlok® is a trademark of Avdel UK Limited

05.2007

Data shown is subject to change without prior notice as a result of continuous product development and improvement policy.
Your local Avdel representative is at your disposal should you need to confirm latest information.