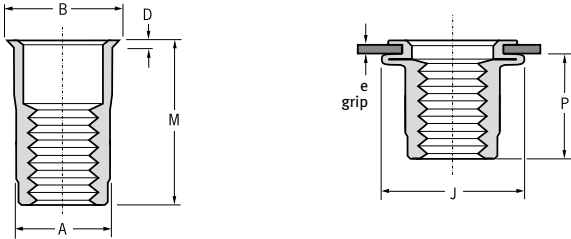



# DK DKS







For installation information please refer to the tooling overview and manuals on our website [www.avdel-global.com](http://www.avdel-global.com).  
 Pour les conditions de pose, merci de vous référer à la description de l'outil et aux manuels disponibles sur notre site Web.  
 Angaben zur Verarbeitung entnehmen Sie bitte der Geräteübersicht und den Betriebsanleitungen auf unserer Website.  
 Per informazioni sull'installazione preghiamo consultare i manuali e la panoramica degli attrezzi sul nostro sito web.  
 Para ver información sobre máquinas de colocación, consulte nuestra página web, apartados visión general de máquinas y manuales.

English	Français	Deutsch	Italiano	Español
Steel	Acier	Stahl	Acciaio	Acero
Zinc plated	Revêtement zingué	Verzinkt	Zincato	Zincado
Clear trivalent passivated	Passivation claire trivalente	Klar chromatiert, Cr6-frei	Passivazione chiara trivalente	Pasivado claro trivalente



Thread / filetage / Gewinde / filetto / rosca	e (grip)		 +0.15/-0	A	B	D	J	M	P	Part No/ref				
	min.	max.		max.	±0.25	±0.05	max.	±0.38	max.					
M4 x 0.7 6H	0.5	2.0	6.75	6.73	7.87	0.48	9.91	10.67	7.75	DKS-470-2.0				
	2.0	3.3						11.94			DKS-470-3.3			
M5 x 0.8 6H	0.5	3.3	7.60	7.52	8.64		11.43	12.07	8.00	DKS-580-3.3				
	3.3	5.7						14.86			DKS-580-5.7			
M6 x 1.0 6H	0.7	4.2	10.00	9.91	11.56	0.55	13.97	14.73	9.65	DKS-610-4.2				
	4.2	6.6						17.27			DKS-610-6.6			
M8 x 1.25 6H	0.7	3.8	13.50	13.46	15.11		18.80	17.53	11.94	DKS-8125-3.8				
	3.8	7.9						20.45			DKS-8125-7.9			
M10 x 1.5 6H	0.7	3.8				13.50	13.46	15.11			18.80	17.53	11.94	DKS-1015-3.8
	3.8	7.9										20.45		

all dimensions in mm / en millimètres / alle Maße in mm / in millimetri / en milímetros

Thread / filetage / Gewinde / filetto / rosca	 Recommended max torque	 Pull-out	 Torque-to-turn	 Push-out
	Nm	kN	Nm	kN
M4 x 0.7 6H	6.2	2.3	1.1	0.8
M5 x 0.8 6H	10.7	2.8	1.4	1.5
M6 x 1.0 6H	18.1	3.0	1.4	1.4
M8 x 1.25 6H	N/A	5.0	2.7	2.3
M10 x 1.5 6H	N/A	5.0	2.7	2.3



An Acument™ Global Technologies Company

[www.avdel-global.com](http://www.avdel-global.com)

© 2008 Acument Intellectual Properties, LLC

02.2008

Data shown is subject to change without prior notice as a result of continuous product development and improvement policy.  
 Your local Avdel representative is at your disposal should you need to confirm latest information.