


# Nutsert® / TSN® 9654, 9655, 9665



For installation information please refer to the tooling overview and manuals on our website [www.avdel-global.com](http://www.avdel-global.com).  
 Pour les conditions de pose, merci de vous référer à la description de l'outil et aux manuels disponibles sur notre site Web.  
 Angaben zur Verarbeitung entnehmen Sie bitte der Geräteübersicht und den Betriebsanleitungen auf unserer Website.  
 Per informazioni sull'installazione preghiamo consultare i manuali e la panoramica degli attrezzi sul nostro sito web.  
 Para ver información sobre máquinas de colocación, consulte nuestra página web, apartados visión general de máquinas y manuales.

English	Français	Deutsch	Italiano	Español
Steel	Acier	Stahl	Acciaio	Acero
Zinc plated	Revêtement zingué,	Verzinkt	Zincato	Zincado
Clear chromated	Passivation claire	Klar chromatiert	Passivazione chiara	Pasivado claro
or	ou	oder	o	o
Stainless Steel	Inox	Edelstahl	Acciaio inox	Acero inoxidable
Natural	Brut	Blank	Nessuna finitura	Natural

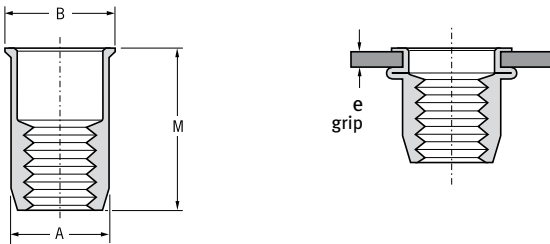

Ø	e (grip)				Steel				Stainless Steel			
	min.	max.	min.	max.	A	B	M	Part No/ref	A	B	M	Part No/ref
6-32 UNC	.020	.079	.250	.254	.249	.287	.410	09655-00613	.248	.273	.410	9655-006SS
8-32 UNC	.020	.079	.250	.254	.249	.287	.410	09655-00813	.248	.273	.410	9655-008SS
10-24 UNC	.020	.118	.281	.285	.280	.320	.465	09655-01014	.280	.305	.460	9655-010SS
	.125	.225	.281	.285	.280	.320	.575	09665-01018				
1/4-20 UNC	.030	.128	.375	.379	.374	.415	.610	09654-00819	.372	.410	.590	9654-008SS
5/16-18 UNC	.040	.200	.500	.504	.499	.540	.720	09654-01000	.497	.540	.730	9654-010SS
3/8-16 UNC	.040	.200	.500	.504	.499	.540	.720	09654-01200	.497	.540	.730	9654-012SS

all dimensions in inches / en pouces / alle Maße in Zoll / in pollici / en pulgadas

Ø	Recommended max torque lbf in max.		Pull-out lbf		Torque-to-turn lbf in min.		Push-out lbf	
	Steel	Stainless Steel	Steel	Stainless Steel	Steel	Stainless Steel	Steel	Stainless Steel
6-32 UNC	45	NA	920	NA	17	NA	310	NA
8-32 UNC	45	NA	920	NA	17	NA	310	NA
10-24 UNC	70	NA	1280	NA	23	NA	445	NA
1/4-20 UNC	110	NA	1520	NA	30	NA	560	NA
5/16-18 UNC	145	NA	3300	NA	31	NA	632	NA
3/8-16 UNC	NA	NA	NA	NA	NA	NA	NA	NA



An Acument™ Global Technologies Company

[www.avdel-global.com](http://www.avdel-global.com)

© 2008 Acument Intellectual Properties, LLC

Nutsert® and TSN® are trademarks of Avdel UK Limited

02.2008

Data shown is subject to change without prior notice as a result of continuous product development and improvement policy.  
 Your local Avdel representative is at your disposal should you need to confirm latest information.