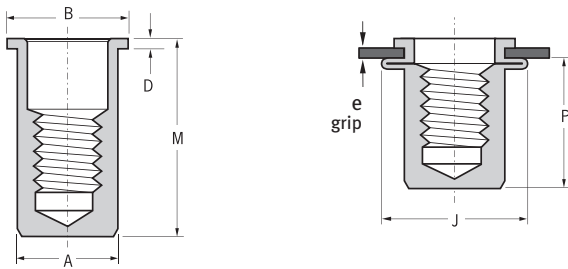



# Nutsert® / Finsert® GM68







English	Français	Deutsch	Italiano	Español
Large flange	A collerette	Flachkopf	Flangiato	Ala Ancha
Closed end	Borgne	Geschlossen	Fondo cieco	Fondo cerrado
Aluminium alloy* (2.5 % Mg)	Alliage d'aluminium* (2.5% Mg)	Aluminium* (2.5 % Mg)	Legia di alluminio* (2.5% Mg)	Aluminio* (2.5% Mg)
Natural	Brut	Blank	Nessuna finitura	Natural

\* : AA 5052, DIN 1725, AlMg2.5, Werkstoff 3.3523



Ø	e (grip)		 +0.1/-0	A	B	D	J	M	P	Part No/ref
	min.	max.		max.	±0.35	±0.15	max.	± 0.35	max.	
M3 x 0.5	0.25	2.00	5.10	5.00	8.00	0.75	7.00	14.00	10.00	OGM68-00320
M4 x 0.7	0.25	3.00	6.10	6.00	10.00	0.75	8.10	15.50	10.80	OGM68-00430
	3.00	4.50						17.00		OGM68-00445
M5 x 0.8	0.25	3.00	7.10	7.00	11.00	1.00	9.60	19.00	14.30	OGM68-00530
	3.00	5.50						21.50		OGM68-00555
M6 x 1.0	0.50	3.00	9.10	9.00	13.00	1.50	12.10	23.00	17.50	OGM68-00630
	3.00	5.50						26.00		OGM68-00655
M8 x 1.25	0.50	3.00	11.10	11.00	16.00	1.50	14.50	24.00	19.00	OGM68-00830
	3.00	5.50						27.00		OGM68-00855

all dimensions in mm / en millimètres / alle Maße in mm / in millimetri / en milímetros

Ø	 Recommended max torque	 Pull-out	 Torque-to-turn	 Push-out
	Nm max.	kN	Nm min.	kN
M3 x 0.5	1.2	3.4	0.7	1.1
M4 x 0.7	4.0	4.9	1.7	1.6
M5 x 0.8	5.3	6.0	1.8	2.0
M6 x 1.0	10.8	8.6	2.3	3.6
M8 x 1.25	23.0	12.3	6.9	4.5



An Acument™ Global Technologies Company

www.avdel-global.com

© 2007 Acument Intellectual Properties, LLC

Nutsert® and Finsert® are trademarks of Avdel UK Limited

03.2007

Data shown is subject to change without prior notice as a result of continuous product development and improvement policy.  
Your local Avdel representative is at your disposal should you need to confirm latest information.